
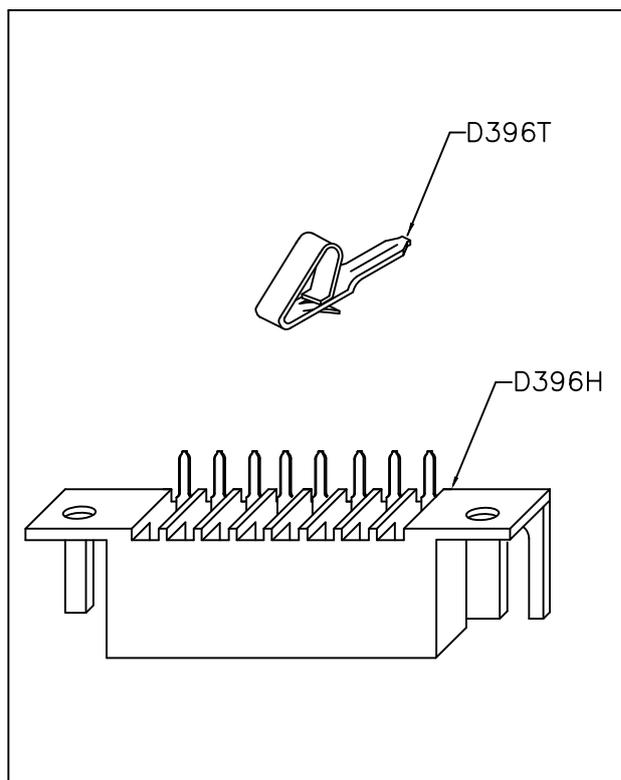


# D396H SERIES

.156" (3.96mm) PITCH CONNECTOR

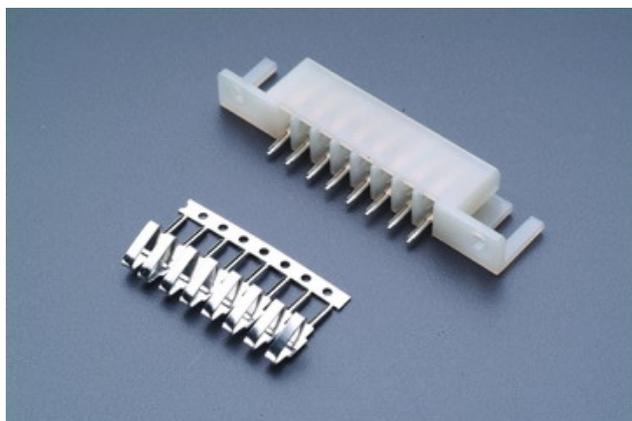


## D396T

- \* THICKNESS: 0.25mm
- \* MAT'L: BRASS TIN PLATED
- \* CURRENT RATING: 5A AC,DC
- \* VOLTAGE RATING: 250V AC,DC
- \* MATES WITH: D396H SERIES HOUSING

## D396H


- \* MAT'L: NYLON 66 UL94V-2
- \* MATES WITH: D396T SERIES TERMINAL

PART NO.	DIM"A"	DIM"B"	DIM"C"
D396-08	54.80	27.72	46.80
D396-15	82.50	55.44	74.50

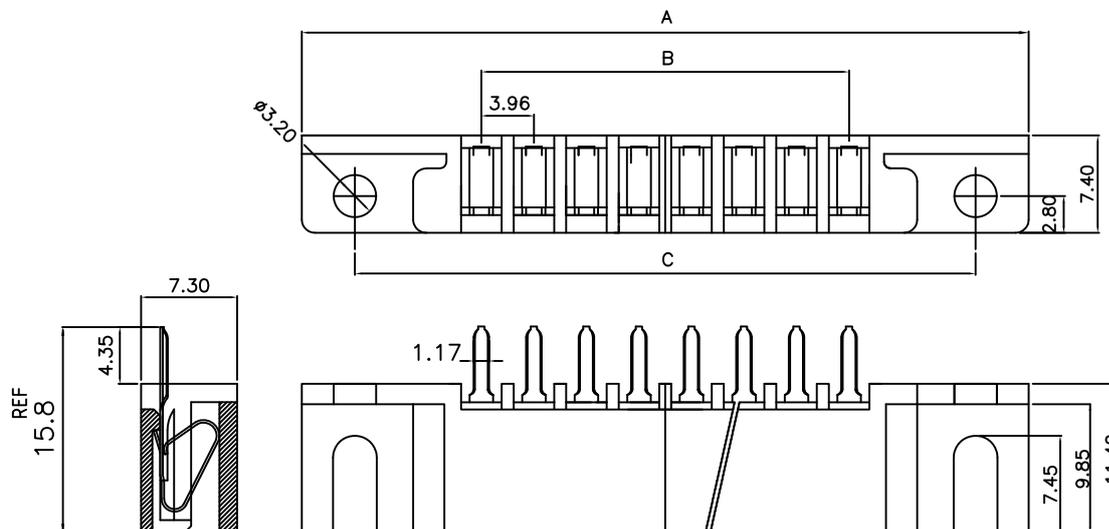

# D396R D396S SERIES

.156" (3.96mm) PITCH PC BOARD CONNECTOR

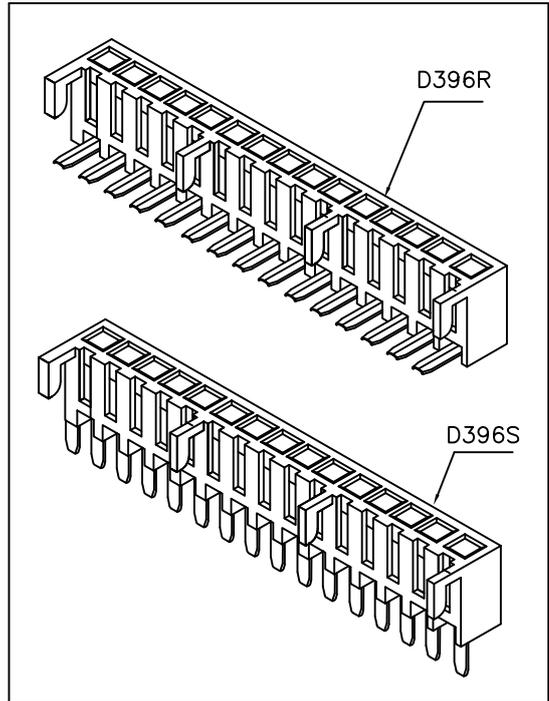

## Specifications

- Current rating: 7A AC,DC
- Voltage rating: 250V AC,DC
- Temperature range: -25°C to +125°C  
(including temperature rise)
- Contact resistance: Initial value/20 mΩ Max.
- Insulation resistance: 1000MΩ MIN.
- Withstanding voltage: 1500V AC/minute
- Applicable wire: Mate With Pin Header

## Features:

- \* INSULATOR: NYLON 66 UL94V-2 OR UL 94V-0
- \* CONTACT: BRASS TIN PLATED

PART NO.	DIM"A"	DIM"B"
D396R-08	39.8	27.72
D396R-15	59.8	55.44

